


Model	NPR250S	NPR250S AMT	NPR250M	NPR250M AMT
GCM (kg)	9,000	9,000	9,000	9,000
GVM (kg)	5,500	5,500	5,500	5,500
Max Power (kW)	114	114	114	114
Wheelbase (mm)	2765	2765	3365	3365
Licence**	Class 1	Class 1	Class 1	Class 1



ENGINE

Engine Model:	4HK1-TCN
Type:	4 cyl 16 valve, SOHC
Displacement:	5,193 cc
Compression Ratio:	17.5:1
Max Power (DIN Nett):	114kW (155 HP) @2,600 RPM
Max Torque (DIN Nett):	419 Nm (309 lb.ft) @1,600 – 2600 RPM
Emission Control System:	Euro V with cooled EGR and Diesel Particulate Diffuser
Fuel System:	Electronically controlled direct injection, high pressure common rail 140 litre fuel tank with lockable fuel cap Water-in-fuel sensor standard
Air Intake System:	Electronically controlled variable nozzle turbo charger with air-to-air intercooler, vertical air intake behind cab

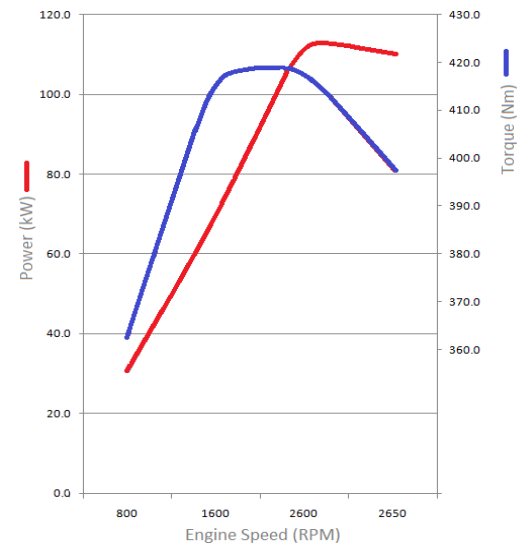

PERFORMANCE

- **Maximum Towed Mass (braked):** 3,500kgs - **1st Gear Gradeability @GVM:** M 53%/AMT 59%
- **Maximum Towed Mass (unbraked):** 2,000kgs - **Est Engine RPM @90km/h :** M 2065/AMT 2050

TRANSMISSION

Manual:	MYY6S 6 spd manual, synchromesh on 1 st to 5 th Auto adjusted 300mm single plate clutch, vacuum assist
Ratios (:1)	1 st 5.979, 2 nd 3.434 3 rd 1.862, 4 th 1.297, 5 th 1.000, 6 th 0.750, Rev 5.701
AMT	MYY6S 6 spd Automated Manual with full automatic and sequential manual shift modes.
Ratios (:1)	1 st 5.979, 2 nd 3.434 3 rd 1.862, 4 th 1.297, 5 th 1.000, 6 th 0.750, Rev 5.701
PTO:	Provision on LHS of transmission case, countershaft driven, wiring harness provided

AXLES

Front Axle:	Isuzu F031
Type:	Elliot reverse I-beam
Capacity:	3,100kgs
Rear Axle:	Isuzu RO66
Type:	Full floating banjo type housing
Capacity:	6,600kgs
Final Drive:	320mm diameter ring gear
Ratio (:1):	4.1

CHASSIS

Front Suspension

- Single stage alloy multi-leaf
- Double acting shock absorber
- Stabiliser bar

Steering

- Power assisted rack and pinion
- Turns lock-to-lock 5.4
- Gear Ratio 20.9:1

Chassis Frame

- Cold riveted ladder frame
- Rail dimensions (mm) 216 x70 x 4
- SAPH440 weldable steel

Rear Suspension

- Taper leaf spring with helper
- Double acting shock absorbers

Electrical

- 24 volt negative earth system
- 50 amp alternator
- Batteries - 2 x 80D26L 80Ah, 582CCA @ 18°C

Brakes

- Auto adjusting front and rear discs with hydraulic dual circuit control, vacuum assisted and Electronic Brake Distribution (EDB)
- ABS and ASR (traction control)
- Hill Start Aid (except AMT)
- Front discs 295mm x 40mm
- Rear discs 320mm x 100mm
- 190mm diam drum park brake on rear of transmission

Wheels and Tyres

- 16.0x5.5Jx116.5mm 5-stud steel wheels
- 195/75 R16C 114/112 M tubeless tyres
- Silver painted wheel rims
- Frame mounted spare wheel with tyre

CAB AND INTERIOR

CAB EXTERIOR

- All steel construction, high tensile steel on cab under-frame and side impact beam reinforcement
- Cab is fully compliant with ECE-R29 crash tests
- Manual cab tilt to 45° with torsion bar assistance
- Liquid filled front and rear cab mounts
- Heavy duty non-slip cab entry steps
- 70° opening doors
- Cab mounted main mirrors on front of cab
- Halogen multi-reflector headlamps with integral front turn signals
- Additional door mounted turn signals
- Polycarbonate front bumper with steel frame
- Combined brake/turn/reverse/marker lamps
- Registration plate lamps
- Reverse alarm buzzer standard

CAB INTERIOR

- Contoured adjustable driver's bucket seat with mechanical suspension rated to 130 k
- Passenger bench seat with capacity for two adults
- Centre seat has lap belt
- 3-point ELR seatbelts in outboard seat positions
- Driver's seat belt has pre-tensioner

CAB INTERIOR (continued)

- SRS including air bag for driver and passenger
- Door and pillar entry assist grips both sides
 - Lined interior, padded roof lining and vinyl floor covers
 - RH and LH overhead storage shelf
 - Height/reach adjustable steering column, soft-feel urethane steering wheel
 - Electric windows
 - Central locking with keyless entry and immobiliser
 - Twin cup holders, 24V cigarette lighter
 - Integrated air conditioning with 4 speed fan
 - Door mounted storage pockets, LH glove box
 - Multi Media radio/CD/DVD/MP3/WMA Player with 6.2" Touch Screen, Bluetooth, voice dialling, text to speech, SD and USB inputs, on-board recordable memory – optional external cameras with up to 4-way screen, GPS navigation and many other options
 - Fluorescent interior light
 - 5 DIN sized compartments for extra communications

INSTRUMENTS and CONTROLS

- Speedometer with digital odometer and two trip meters, tachometer, engine coolant temperature, fuel level gauges
- Two-speed wipers with intermittent wipe mode
- Key operated engine start/stop, steering lock
- HSA slow/fast engagement control with on/off switch (except AMT)
- ASR on/off switch
- DPD manual regenerate switch
- AMT: slow/fast clutch engagement control, 1st gear selection, economy mode
- LH combination stalk: Windscreen wipers, washers and exhaust brake
- RH combination stalk: Indicators, light switch and headlamp dip switch
- Warning lamps: Check engine, oil pressure, ABS, SRS, alternator charge, service brake, park brake on, seat belt unbuckled, AMT check
- Indicator lamps – HAS (except AMT), warm up system, high beam, DPD status, 1st gear start, turn signals
- AMT only: Econo mode, 1st gear start, gear selection display

WEIGHTS (kgs)


Model Codes	MODELS	RATINGS *		LOADING LIMITS (at ground)*		CHASSIS CAB TARE MASS **		
		GVM	GCM	FRONT	REAR	FRONT	REAR	TOTAL
NP0113	NPR250S	5500	9000	2360	4480	1660	765	2425
NP0213	NPR250S AMT	5500	9000	2360	4480	1680	805	2485
NP0313	NPR250M	5500	9000	2360	4480	1670	785	2455
NP0413	NPR250M AMT	5500	9000	2360	4480	1690	825	2515

* Vehicle ratings and front and rear mass limits are subject to regulatory requirements – Consult your dealer to select a specific vehicle to suit your requirements
 ** Chassis cab as supplied from the factory including 10 litres of fuel

DIMENSIONS (mm)

Models	WB	OAL	CH *	FOH	ROH	EA	CE	RT	ORT	FW	RFH *	BOC	Kerb to Kerb (m)
NPR250 S and S AMT	2765	5385	2260	1110	1510	2080	3702	1650	2080	850	750	112	9.6
NPR250 M and M AMT	3365	5985	2260	1110	1510	2680	4302	1650	2080	850	750	112	11.7

* Unladen condition, chassis cab only

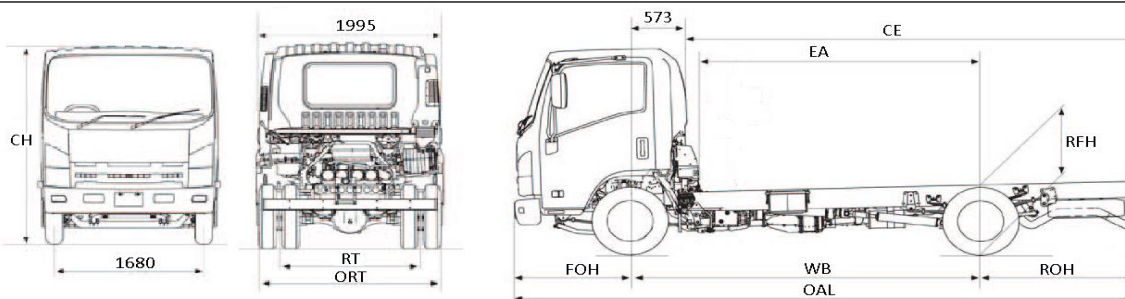

WARRANTY

Full vehicle warranty: 36 months or 100,000 kilometres whichever occurs first

All warranty is subject to terms and conditions as detailed in the Owner's Manual Service and Warranty Supplement

A policy of continuous improvement means that these specifications are subject to change without notice. Contact your Isuzu dealer or visit our website at Isuzu.co.nz to confirm specifications. Images of vehicles are representative only and may differ slightly from the actual vehicle

** Always refer to NZTA to confirm & for Licensing changes